

Stringer Lights Instruction Manual (Outdoor Patio Stringer)

ALL BULBS MUST BE REMOVED FROM STRING DURING TRANSPORTATION TO ENSURE PRODUCT SAFETY!! CUSTOMER IS RESPONSIBLE FOR REMOVING BULBS AND PLACING THEM BACK INTO PACKAGING!!

~ Package includes 4 extra bulbs in case any were burnt out – If this were to happen, please put burnt bulb back into packaging and label it. When lights are received and counted there will be no additional costs as per the damage waiver - If the client is not covered under damage waiver, broken bulbs will have to be paid for


~ Please handle product with care – If cords are damaged, client will be charged for full retail price of lights

IMPORTANT - Please Refer to String Light Installation Instructions!!


STRING LIGHT INSTALLATION INSTRUCTIONS

INSTALLATION METHODS

1. Using a Guide Wire with S-hooks or zip ties(not included)

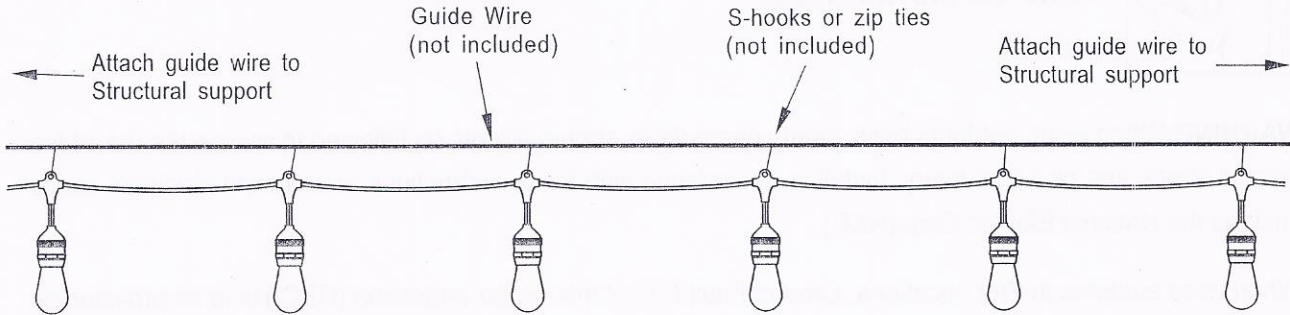

2. Attached to a Structure

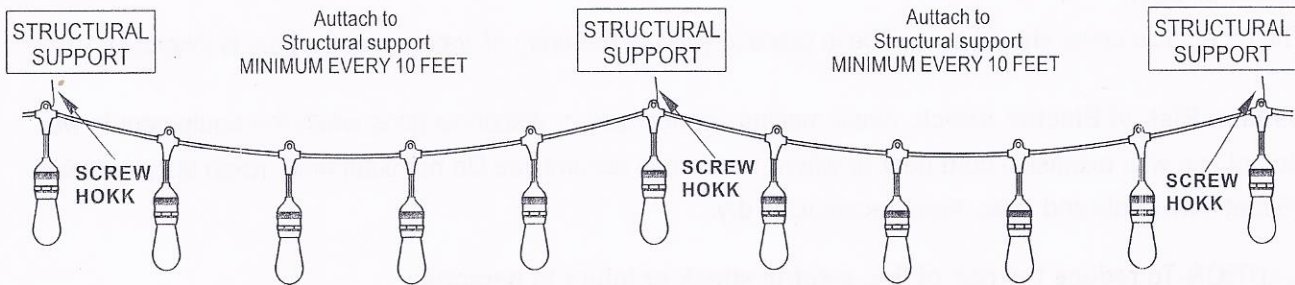

RE-LAMPING STRING LIGHTS

WARNING-RISK OF ELECTRICSHOCK!! Disconnect power at source prior to re-lamping String Lights.

For outdoor String Lights, do NOT re-lamp light strings during rain or when wet.

1. Re-lamp String Lights only during dry and calm weather conditions.
2. Unscrew existing lamps by lightly holding the socket in one hand and twisting the lamp counterclockwise. Lamps may be tight in the sockets. This is normal to prevent moisture from getting into socket.
3. Replace with medium base lamp. Screw bulb into socket clockwise until top of socket forms a tight seal around bulb and bulb makes solid contact with socket. **Do not exceed 1440 watts all sets combined. See chart on below.** Suitable for Incandescent, CFL, LED or CCL lamps.

MAXIMUM WATTAGE RANGE	NUMBER OF LIGHT STRINGS
7.5WATT	8SETS
8-10WATT	6SETS
11-12WATT	5SETS
13-15WATT	4SETS
16-20WATT	3SETS
21-30WATT	2SETS
31-60WATT	1SETS

SAVE THESE INSTRUCTIONS

STRING LIGHT INSTALLATION INSTRUCTIONS



READ ALL INSTRUCTIONS

WARNING:When using outdoors basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury. Install in accordance with these instructions and current electrical codes such as the National Electric Code(NEC).

When used outdoors in Wet Locations, Ground Fault Circuit Interrupter protection (GFCI) is to be provided on the circuits or outlets. Extension cords rated for outdoor use must be used, such as type:SPT-2W, SJTOOW, SJTOW, SJTW,SJOOW, SJOW, SJW, SJEOW, SJEOW, SJEOW, STOW, STW, SOOW, SOW, SEOOW, SEOW or SEW.

The receptacle cover should always be in place to prevent the entry of water(unless a plug is inserted).

Caution:Risk of Electric Shock. Avoid making connections or disconnections when the equipment is wet. Do not use with extension cord near or where water may accumulate.Do not submerge. Keep lamps at least 16 feet from pools and spas. Keep receptacles dry.

CAUTION-To reduce the risk of fire, electric shock or injury to persons:

1. Commercial Grade String Light is intended for installation indoor or outdoor.
2. String Lights must be supported by steel guide cables or other suitable supporting hardware such as s-hooks, screw hooks or zip ties (not included) whenever span distances exceed twenty four feet. See Installation Methods on reverse.
3. Light sockets must be installed base up so that bulbs are facing down ONLY.
4. Keep combustible material clear of bulbs. Do NOT allow lamps or sockets to come into contact with walls, fabrics associated with shades, blinds or other materials. Lamps should hang freely in a downward direction with a minimum of 3" space from the nearest object.
5. Do not cluster the bulbs.
6. Not intended for installation in ceilings, soffits, cabinets or other enclosed spaces.
7. Do NOT secure light string to buildings or other structural supports using nails, staples or other sharp, conducting materials. DO NOT DAMAGE THE WIRE.
8. Avoid damage to the insulation during installation. Do NOT pierce or other wise compromise wire's or socket's outer covering, jacket or sheathing.
9. Periodically inspect wire and sockets for degradation due to weather, UV light or other damage. Promptly replace worn out light string.
10. **DO NOT EXCEED 1440 WATTS, ALL SETS COMBINED. SEECHART ON REVERSE.**

WARNING: -RISK OF ELECTRIC SHOCK!!

Disconnect power at source prior to wiring, re-lamping or servicing in any way.

1. The light string kits are supplied with an attached two prong plug that will only fit into a two prong outlet.

Do not alter the plug.